

# 48V Lithium Home Battery Storage System Rechargeable Secondary

UN38.3, MSDS, UL, CB, BIS, PSE, GB4943.1

safety standard, CE, FCC, ROHS, battery UN38.3, MSDS, UL, CB, BIS, PSE

### **Basic Information**

- Place of Origin:
- Brand Name: XWELL

China

Carton

7-10 working days

5000 pcs per month

- Certification:
- Model Number: XW-5120W-1
- Minimum Order Quantity: 1 pcs
- Packaging Details:
- Delivery Time:
- Payment Terms: L/C, D/A, D/P, T/T, Western Union, MoneyGram
- Supply Ability:



## **Product Specification**

Product Voltage:	48V To 51.2V
<ul> <li>Product Cell Type:</li> </ul>	LiFePO4 Prismatic Battery Cell
Product Capacity:	50 To 200Ah
<ul> <li>Product Energy:</li> </ul>	2.56 To 10.24Kwh
<ul> <li>Discharge Current:</li> </ul>	50A
<ul> <li>Max Charge Current:</li> </ul>	50A
• Discharge Cut-off Voltage:	42.5V
• Display:	LCD Optional
Communication Interface:	RS485, RS232, CAN
Cycle Life:	>6000 Cycles(80%DOD)
Highlight:	Lithium Home Battery Storage System, 48V Home Battery Storage System

# High Energy Lithium Rechargeable Secondary Battery Pack Li-Ion Storage Accumulators Power Supply UPS Solar Home Storage

Telecom Energy Storage System is an excellent energy source for 48V applications. It is especially designed for telecom sites due to its extraordinary feature: better charging and discharging performance, longer lifespan, smaller size, and theft-proof design. The energy storage system provides a perfect replacement for Lead Acid Battery.

#### **Product Feature**

- 1. High performance LFP battery cells are selected. The comprehensive operation cost is low.
- 2.Compact structure minimize the size, and the product is in harmony with the home environment.
- 3. With Perfect BMS protection function and all-round control system, the battery can run safely and efficiently.
- 4.CAN2.0, RS485 and RS232 communication protocols are supported, and inverters of various brands can be matched.

#### Important Notice

- 1. This product has built-in lithium-ion battery pack, keep it away from fire.
- 2. Make sure the product is protected from moisture and keep it away from water or humid conditions.
- 3. Do not drop, puncture, or damage this product as it may cause the battery to become unstable

#### **Rechargeable Lithium Battery Pack Specification**

Model	51.2V50Ah	51.2V100Ah	51.2V200Ah		
Nominal voltage	51.2V				
Nominal capacity (kwh)	2.56	5.12	10.24		
Cell type	LiFePO4				
Standard charge voltage	54.6V(adjustable)				
Max charge current	50A				
Discharge cut-off voltage		42.5V(adjustable)			
Max discharge current		50A			
Display	LCD(Optional)				
Communication interface	CAN/RS485/RS232				
Cycle life	>6000 Cycles (80%DOD)				
Charge temperature range	0~45°C				
Discharge temperature range	-20~60°C				
Color	Black				
Dimension (mm)	442x410x133 3U	442x410x177 4U	550x442x220 5U		
Weight	About 35Kg About 42Kg About 84Kg				
Installation method	Rack Mount				


#### Cell Specification of Rechargeable Lithium Battery Pack

3	#	Item	Parameter
>	A	Height	119±1.0 mm
	В	Width	160±1.0 mm
-	c	Thickness	< 50 mm
	D	Tabs Distance	97±0.5 mm


**Operation Pannel of Rechargeable Lithium Battery Pack** 

	Ĩ	LiFePO4 Battery			· · · ·
	۔ م				
		(6)(7)(8)(9)(9)(4)(4) Eunction	#	Item	(s) (w)
#	Item	Function	#	Item SOC Indicator	Function
#		Function mount in 19 inch cabinet or anti-seismic rake	(8)	SOC Indicator	Function Indicate battery capacity percentage
# (1) (2)	Item Case Hanger	Function	(8) (9)		Function
# (1) (2) (3)	Item Case Hanger Handie	Function mount in 19 inch cabinet or anti-seismic rake easy to handle, move and install	(8)	SOC Indicator Dry Contact	Function Indicate battery capacity percentage remote on/off control by signal wires
# (1) (2) (3) (4)	Item Case Hanger Handle Reset Switch	Function mount in 19 inch cabinet or anti-seismic rake easy to handle, move and install restart and wake up the battery	(8) (9) (4)	SOC Indicator Dry Contact Comm. Port	Function Indicate battery capacity percentage remote on/off control by signal wires RS485+RS232
# (1) (2) (3) (4) (5) (6)	Item Case Hanger Handle Reset Switch On/Off Indicator Working	Function mount in 19 inch cabinet or anti-seismic rake easy to handle, move and install restart and wake up the battery turn on/off green and indicate battery on/off	(8) (9) (1) (1)	SOC Indicator Dry Contact Comm. Port Comm. Port	Function Indicate battery capacity percentage remote on/off control by signal wires RS485+RS232 RS232

Size of Rechargeable Lithium Battery Pack

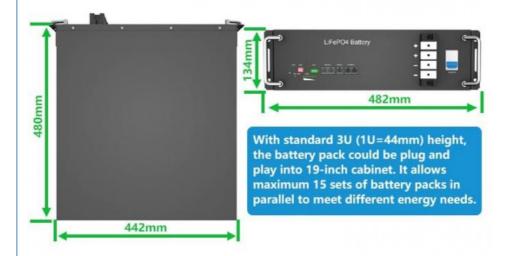

Structure of Rechargeable Lithium Battery Pack



#	Item	Material
(1)	Case Cover	SPCC
(2)	Case Hanger	SPCC
(3)	Insulation Sheet	Ethoxyline
(4)	Bus-Bar	Aluminum Alloy
(5)	Battery Cell	LFP, Aluminum Shell
(6)	Module Side Plate	ABS / PC
(7)	Cell Binding Loop	Plastic Steel
(8)	Case Bottom	SPCC
(9)	Insulating Wiring Terminal	Bakelite
(10)	Side Plate Combination Board	SPCC
(11)	BMS	PCB
(12)	Commination Board	PCB
(13)	DC Switch	1
(14)	Handle	Sherardized SPCC
(15)	Case Front Cover	SPCC
(16)	Terminal Bar (+ & -)	1

Application of Rechargeable Lithium Battery Pack

# **Application Scenario**



**Data Center** 



**Telecom Base** 

#### RFQ

Q1: Are your a factory or trading company?

A: We are a professional battery manufacturer with our own factory and brand. We provide all kinds of OEM/ODM services for clients, can produce by your samples or technical drawings. We can build the molds and fixtures.

Q2.Can I have a sample order?

A: Yes, we welcome sample orders to test and check quality.

Q3: Where can I get the price?

A: We will offer you the best quotation in 12 hours after we get the product specifications such as voltage capacity application etc.

Q4. What is your terms of payment?

A: T/T 30% as deposit, and 70% before delivery. We'll show you the photos of the products and packages before you pay the balance.

Q5. How about your delivery time?

A: Generally, it will take 15-30 days after receiving your advance payment. The specific delivery time depends on the items and the quantity of your order.

Q6. Do you test all your goods before delivery?

A: Yes, We have a professional QC team to make sure that the product in good condition before send out the goods.

- Q7: How do you make our business long-term and good relationship?
- A:1. We keep good quality and competitive price to ensure our customers benefit ;

2. We respect every customer as our friend and we sincerely do business and make friends with them, no matter where they come from.



## **XWELL** GUANGDONG XWELL TECHNOLOGY CO., LTD.

+86 18620492985

sales@esslithiumbattery.com

esslithiumbattery.com

Room 322, Building 3, No. 801, Qiaoxing Avenue, Xiaoluo Village, Shatou Street, Panyu District, Guangzhou, China



#### **C&I** Park



**Medical Equipment**