



Floor-Mounted Home Energy Storage System 48V 10.24kwh 200A Lithium Batterie Lifepo4

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: XWELL
- Certification: UN38.3, MSDS, UL, CB, BIS, PSE, GB4943.1 safety standard, CE, FCC, ROHS, battery UN38.3, MSDS, UL, CB, BIS, PSE
- Model Number: XW-1024W-1
- Minimum Order Quantity: 1 pcs
- Price: USD
- Packaging Details: Carton
- Delivery Time: 7-10 working days
- Payment Terms: L/C, D/A, D/P, T/T, Western Union, MoneyGram
- Supply Ability: 5000 pcs per month



Product Specification

- Max Continuous Charge Curre: 200A
- Voltage(V): 48V
- Cell Type: LiFePO4 Prismatic Cell
- Discharge Current: 200A
- Max Charge Current: 200A
- Discharge Cut-off Voltage: 42.5-51.2V
- Communication Interface: RS485, RS232, CAN
- Nominal Energy (kwh): 10.24Kwh
- Highlight: **Floor-Mounted Home Energy Storage System, 200A Home Energy Storage System, 48V 10.24kwh Home Energy Storage System**

Product Description

2.56kwh 5.12kwh 10.24kwh 200a Lithium Batterie Lifepo4 All In One Home Energy Storage System

All In One Home Energy Storage System

Floor-mounted home energy storage systems are self-contained units designed to be installed on the floor, typically in a basement, garage, or utility room. They provide whole-home battery backup and energy management capabilities.


Key Features

Larger storage capacity compared to wall-mounted systems, often 10-20 kWh
 Freestanding, floor-mounted enclosure for easy installation
 Integrated power conversion, battery management, and control systems
 Connectivity to home energy management platforms and solar PV
 Backup power supply during grid outages
 Ability to store and dispatch renewable energy

Rackmount Lithium Battery Specification


Model	51.2V50Ah	51.2V100Ah	51.2V200Ah
Nominal voltage	51.2V		
Nominal capacity (kwh)	2.56	5.12	10.24
Cell type	LiFePO4		
Standard charge voltage	54.6V(adjustable)		
Max charge current	50A		
Discharge cut-off voltage	42.5V(adjustable)		
Max discharge current	50A		
Display	LCD(Optional)		
Communication interface	CAN/RS485/RS232		
Cycle life	>6000 Cycles (80%DOD)		
Charge temperature range	0~45°C		
Discharge temperature range	-20~60°C		
Color	Black		
Dimension (mm)	442x410x133 3U	442x410x177 4U	550x442x220 5U
Weight	About 35Kg	About 42Kg	About 84Kg
Installation method	Rack Mount		

Cell Specification of Rackmount Lithium Battery




#	Item	Parameter
A	Height	119±1.0 mm
B	Width	160±1.0 mm
C	Thickness	≤ 50 mm
D	Tabs Distance	97±0.5 mm


Operation Pannel of Rackmount Lithium Battery

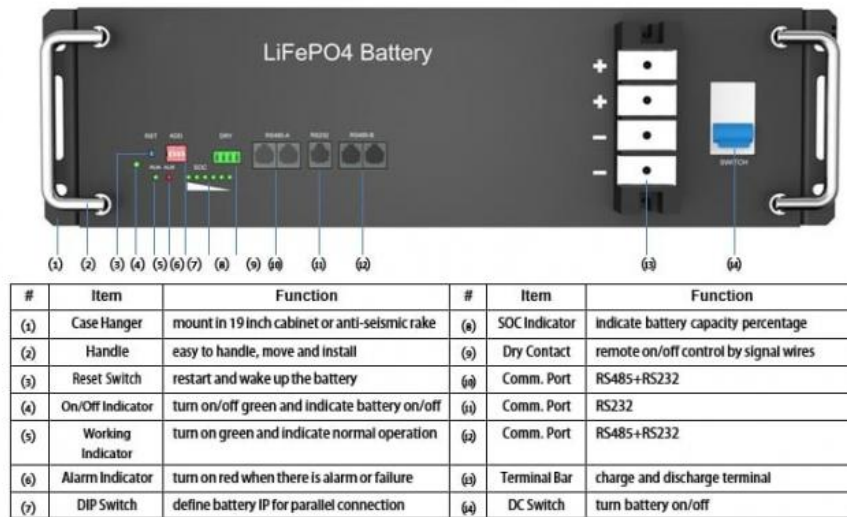

Size of Rackmount Lithium Battery

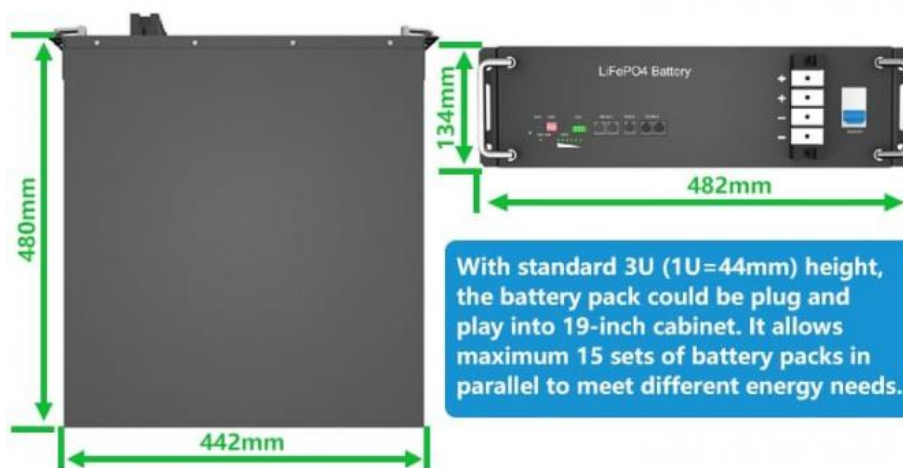

Structure of Rackmount Lithium Battery

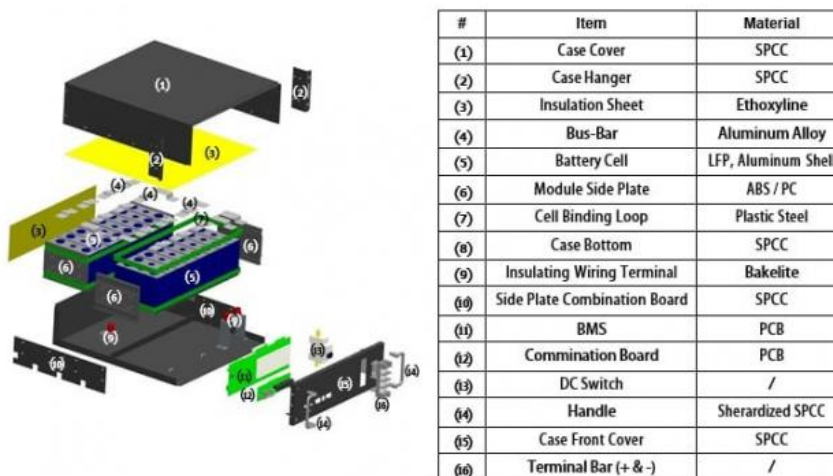

Application of Rackmount Lithium Battery

Application Scenario



Data Center



C&I Park



Telecom Base



Medical Equipment

Why choose us?

We production of battery products are widely used in communications, power, financial systems, uninterruptible power supply systems (UPS), power plant and substation switch control, solar panels, controllers inverter etc solar systems, emergency lighting, alarm systems, cars, ships, motorcycles, electric bicycles and other industries. Sales network covers all provinces, municipalities, autonomous regions and established offices in various places and after-sales service center.

Our team with Yuasa ,BYD battery senior consultant,High quality technical management team, advanced production and testing equipment to ensure the quality of the battery is reliable.



XWELL GUANGDONG XWELL TECHNOLOGY CO., LTD.

+86 18620492985

sales@esslithiumbattery.com

esslithiumbattery.com

Room 322, Building 3, No. 801, Qiaoxing Avenue, Xiaoluo Village, Shatou Street, Panyu District, Guangzhou, China