



### 30kwh - 50kwh Low Voltage Lifepo4 Rackmount Lithium Battery Power **Storage Option**

#### **Basic Information**

. Place of Origin: China Brand Name: **XWELL** 

· Certification: UN38.3,MSDS,UL,CB,BIS,PSE,GB4943.1

safety standard, CE, FCC, ROHS, battery

UN38.3, MSDS, UL, CB, BIS, PSE

XW-1024W-1 Model Number:

Minimum Order Quantity: 1 pcs USD • Price: · Packaging Details: Carton

. Delivery Time: 7-10 working days

Payment Terms: L/C, D/A, D/P, T/T, Western Union,

MoneyGram

. Supply Ability: 5000 pcs per month



### **Product Specification**

• Operating Voltage Range: 456V-584V

. Cell Type: LiFePO4 Prismatic Cell

Unit: 6pcs-10pcs Max Charge/discharge 1000A

 Communication Interface: RS485, RS232, CAN

 Nominal Capacity (kwh: 30-50khw • Oficial Voltage: 51.2V . Chemistry: Lifepo4

· Highlight: Low Voltage Rackmount Lithium Battery,

> 50kwh Rackmount Lithium Battery, 30kwh Rackmount Lithium Battery

#### **Product Description**

# 30kwh-50kwh Low Voltag Lifepo4 Rackmount Lithium Battery Energy Storage System For Industrial Applications

**Capacity Range**: These systems are typically available in capacities ranging from 30 kWh to 50 kWh, providing a scalable solution for different energy storage needs.

**Voltage**: They operate at lower voltages, such as 48V DC or 120/240V AC, making them more suitable for smaller industrial and commercial settings compared to high-voltage systems.

**Battery Chemistry**: Like the high-voltage systems, these also use lithium iron phosphate (LiFePO4) battery cells, known for their safety, long cycle life, and reliability.

**Rack Mount Design**: The modular rackmount form factor allows these systems to be easily installed and integrated into industrial facilities, server rooms, and other space-constrained environments.


#### Use Cases:

Renewable energy integration and time-shifting Backup power and uninterruptible power supply (UPS) Peak shaving and load shifting to reduce energy costs Frequency regulation and grid ancillary services

#### **Rackmount Lithium Battery Specification**


Model	51.2V50Ah	51.2V100Ah	51.2V200Ah			
Nominal voltage	51.2V					
Nominal capacity (kwh)	2.56	5.12	10.24			
Cell type	LiFePO4					
Standard charge voltage		54.6V(adjustable)				
Max charge current		50A				
Discharge cut-off voltage	42.5V(adjustable)					
Max discharge current	50A					
Display	LCD(Optional)					
Communication interface	CAN/RS485/RS232					
Cycle life	>6000 Cycles (80%DOD)					
Charge temperature range	0~45°C					
Discharge temperature range	-20~60°C					
Color	Black					
Dimension (mm)	442x410x133 3U	442x410x177 4U	550x442x220 5U			
Weight	About 35Kg	About 42Kg	About 84Kg			
Installation method	Rack Mount					

#### Cell Specification of Rackmount Lithium Battery




#	Item	Parameter
А	Height	119±1.0 mm
В	Width	160±1.0 mm
С	Thickness	≤50 mm
D	Tabs Distance	97±0.5 mm

#### **Operation Pannel of Rackmount Lithium Battery**

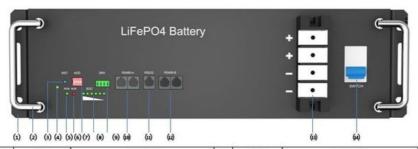


#	Item	Function	#	Item	Function
(1)	Case Hanger	mount in 19 inch cabinet or anti-seismic rake	(8)	SOC Indicator	indicate battery capacity percentage
(2)	Handle	easy to handle, move and install	(9)	Dry Contact	remote on/off control by signal wires
(3)	Reset Switch	restart and wake up the battery	(10)	Comm. Port	RS485+RS232
(4)	On/Off Indicator	turn on/off green and indicate battery on/off	(11)	Comm. Port	RS232
(5)	Working Indicator	turn on green and indicate normal operation	(12)	Comm. Port	RS485+RS232
(6)	Alarm Indicator	turn on red when there is alarm or failure	(13)	Terminal Bar	charge and discharge terminal
(7)	DIP Switch	define battery IP for parallel connection	(14)	DC Switch	turn battery on/off

#### Size of Rackmount Lithium Battery

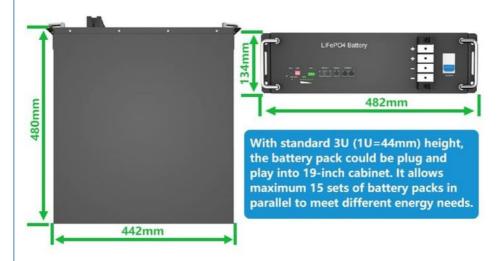

#### **Structure of Rackmount Lithium Battery**



#	Item	Material
(1)	Case Cover	SPCC
(2)	Case Hanger	SPCC
(3)	Insulation Sheet	Ethoxyline
(4)	Bus-Bar	Aluminum Alloy
(5)	Battery Cell	LFP, Aluminum Shel
(6)	Module Side Plate	ABS / PC
(7)	Cell Binding Loop	Plastic Steel
(8)	Case Bottom	SPCC
(9)	Insulating Wiring Terminal	Bakelite
(10)	Side Plate Combination Board	SPCC
(11)	BMS	PCB
(12)	Commination Board	PCB
(13)	DC Switch	1
(14)	Handle	Sherardized SPCC
(15)	Case Front Cover	SPCC
(16)	Terminal Bar (+ & -)	1

#### **Application of Rackmount Lithium Battery**

## **Application Scenario**



**Data Center** 



C&I Park



**Telecom Base** 



**Medical Equipment** 

#### Why choose us?

Technical specifications and performance capabilities Safety record and certifications Warranty terms and after-sales support Integration with existing infrastructure Cost-effectiveness and total cost of ownership Company reputation, experience, and financial stability Scalability and flexibility to adapt to changing needs

## XWELL GUANGDONG XWELL TECHNOLOGY CO., LTD.



+86 18620492985



sales@esslithiumbattery.com



esslithiumbattery.com

Room 322, Building 3, No. 801, Qiaoxing Avenue, Xiaoluo Village, Shatou Street, Panyu District, Guangzhou, China