

Stackable Lithium Battery Pack For Solar Energy Storage System

UN38.3, MSDS, UL, CB, BIS, PSE, GB4943.1

safety standard, CE, FCC, ROHS, battery UN38.3, MSDS, UL, CB, BIS, PSE

Basic Information

- Place of Origin:
- Brand Name: XWELL
- Certification:
- Model Number: XW-5120W-1
- Minimum Order Quantity: 1 pcs
- Packaging Details: Carton
- Delivery Time:
- Payment Terms: L/C, D/A, D/P, T/T, Western Union,

7-10 working days

5000 pcs per month

MoneyGram

China

Supply Ability:



Product Specification

• Packaging Details:	Standard Carton Package/Single Package/Wooden Package As You Required
Decision of Territory	5 5 1
 Payment Terms: 	TT
 Pack Capacity: 	50Ah 100Ah 200Ah
 Pack Energy: 	2.56Kwh 5.12Kwh 10.24Kwh (Optional)
 Discharge Current: 	50A
 Max Charge Current: 	50A
• Discharge Cut-off Voltage:	42.5V
 Display: 	LCD Optional
Communication Interface:	RS485, RS232, CAN
Cycle Life:	>6000 Cycles(80%DOD)
Highlight:	Stackable Lithium Battery Pack, Solar Energy Storage Lithium Battery Pack

Stackable Lithium Battery Pack For Solar Energy Storage System

LiFePO4 Battery Type: Utilizes LiFePO4 chemistry for enhanced safety, long cycle life, and high energy density.

 \cdot Flexible Output Power Range: Offers an output power range of 10-20 kWh to meet specific energy needs.

 \cdot System Type: Seamlessly integrates with existing home energy systems for easy installation and compatibility.

• Lightweight Design: Weighing only 80kg, it is easy to handle and install within your home energy setup. • Advanced Communication Port: Equipped with a CAN communication port for efficient data exchange and coordination.

· IP65 Protection Class: Features IP65 protection against dust and water ingress, suitable for indoor and outdoor use.

· Off-Grid Grid Connection: Designed for off-grid applications to harness and store renewable energy.

· High Nominal Voltage and Capacity: Nominal voltage of 48V and capacity of 200Ah for reliable and stable power supply.

Rackmount Lithium Battery Specification

Model	51.2V50Ah	51.2V100Ah	51.2V200Ah	
Nominal voltage		51.2V		
Nominal capacity (kwh)	2.56	5.12	10.24	
Cell type		LiFePO4		
Standard charge voltage		54.6V(adjustable)		
Max charge current		50A		
Discharge cut-off voltage		42.5V(adjustable)		
Max discharge current		50A		
Display	LCD(Optional)			
Communication interface		CAN/RS485/RS23	2	
Cycle life	>6000 Cycles (80%DOD)			
Charge temperature range	0~45°C			
Discharge temperature range	-20~60°C			
Color	Black			
Dimension (mm)	442x410x133 3U	442x410x177 4U	550x442x220 5U	
Weight	About 35Kg	About 42Kg	About 84Kg	
Installation method	Rack Mount			


Cell Specification of Rackmount Lithium Battery

AN AN	#	Item	Parameter
	A	Height	119±1.0 mm
	В	Width	160±1.0 mm
-	c	Thickness	≤50 mm
2	D	Tabs Distance	97±0.5 mm


Operation Pannel of Rackmount Lithium Battery

1		LiFePO4 Battery			• 🛄 🗕 🗂
	(1) (2) (3) (4) (5)(6)(7) (8) (9) (0) (1) (12)			(13) (14)
#	(1) (2) (3) (4) (5 Item)(රා (ම) (ම) (ඩ) (ඩ) Function	#	Item	(a) (a) Function
			#	Item SOC Indicator	
#	Item	Function			Function
# (1)	Item Case Hanger	Function mount in 19 inch cabinet or anti-seismic rake	(8)	SOC Indicator	Function Indicate battery capacity percentage
# (1) (2)	Item Case Hanger Handle	Function mount in 19 inch cabinet or anti-seismic rake easy to handie, move and install	(8) (9)	SOC Indicator Dry Contact	Function indicate battery capacity percentage remote on/off control by signal wires
# (1) (2) (3)	Item Case Hanger Handle Reset Switch	Function mount in 19 inch cabinet or anti-seismic rake easy to handle, move and install restart and wake up the battery	(8) (9) (0)	SOC Indicator Dry Contact Comm. Port	Function indicate battery capacity percentage remote on/off control by signal wires RS485+RS232
# (1) (2) (3) (4)	Item Case Hanger Handle Reset Switch On/Off Indicator Working	Function mount in 19 inch cabinet or anti-seismic rake easy to handle, move and install restart and wake up the battery turn on/off green and indicate battery on/off	(8) (9) (0) (1)	SOC Indicator Dry Contact Comm. Port Comm. Port	Function indicate battery capacity percentage remote on/off control by signal wires RS485+RS232 RS232

Size of Rackmount Lithium Battery

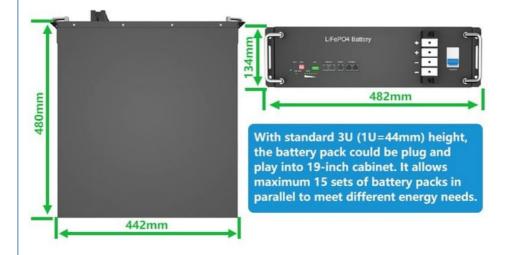

Structure of Rackmount Lithium Battery



#	Item	Material
(1)	Case Cover	SPCC
(2)	Case Hanger	SPCC
(3)	Insulation Sheet	Ethoxyline
(4)	Bus-Bar	Aluminum Alloy
(5)	Battery Cell	LFP, Aluminum Shell
(6)	Module Side Plate	ABS / PC
(7)	Cell Binding Loop	Plastic Steel
(8)	Case Bottom	SPCC
(9)	Insulating Wiring Terminal	Bakelite
(10)	Side Plate Combination Board	SPCC
(11)	BMS	PCB
(12)	Commination Board	PCB
(13)	DC Switch	1
(14)	Handle	Sherardized SPCC
(15)	Case Front Cover	SPCC
(16)	Terminal Bar (+ & -)	1

Application of Rackmount Lithium Battery

Application Scenario



Data Center



C&I Park



Telecom Base



Medical Equipment

What We Offer?

Supply chain solution, strict quality control, real-time response OEM/ODM Manufacturer, custom sizes and shapes available on request Suggestion of new design or material, new technology and cost structure Engineers team at your service Flexible small orders are acceptable One-stop supply to eliminating messy links



XWELL GUANGDONG XWELL TECHNOLOGY CO., LTD.

sales@esslithiumbattery.com

+86 18620492985

esslithiumbattery.com

Room 322, Building 3, No. 801, Qiaoxing Avenue, Xiaoluo Village, Shatou Street, Panyu District, Guangzhou, China